



2 sec = OFF



Transportation



User Manual:



www.leica-geosystems.com



LASER
2





IEC 60825-1:2014 λ=620-690nm Pmax<1mW tp=35-65µs, cw

SAP. No. 864419


- when it has to be **right**

Leica
Geosystems


Adapter setup

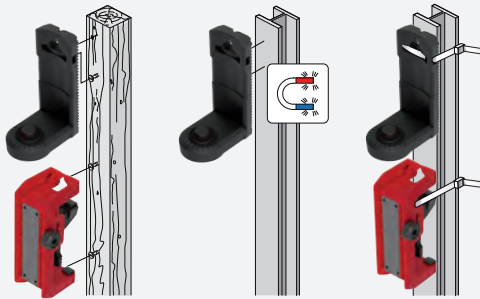

Usable with UAL 130

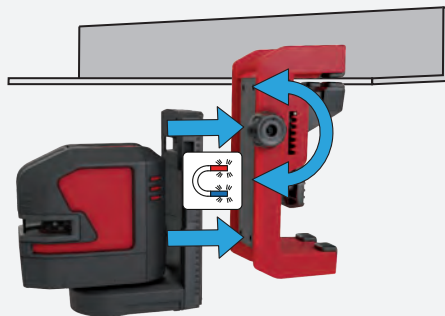

Usable with Receiver

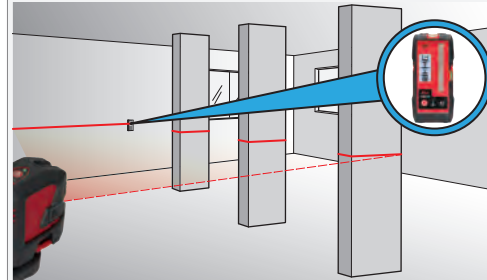

Quick Start Leica Lino L2

Status LED

Laser key

Battery pack

Window of vertical line

Window of horizontal line

Levelling lock

Tripod thread 1/4"




- when it has to be **right**

Leica
Geosystems


Insert batteries/Li-Ion



1x - Laser on

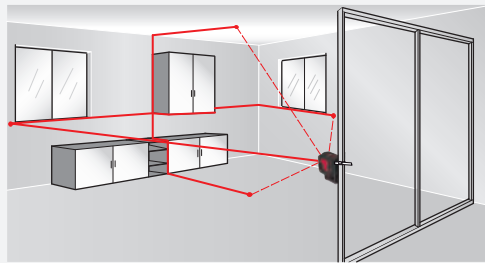

3x - Vertical mode

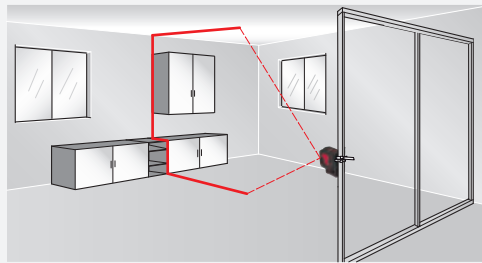


Charging Li-Ion battery




Self levelling / Levelling lock



2x - Horizontal mode

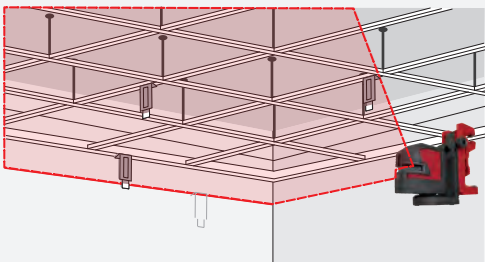

1x + 1x

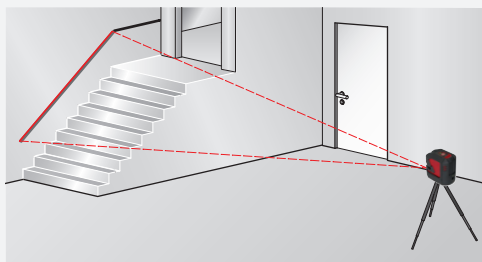

Status LED



- Normal operation
- Instrument locked
- Low battery
- Out of level